

## PT Compact USB

Resistance Thermometer

Programmable via USB-interface



### Description

The PT Compact USB is an additional member of the tectec PT Compact series. The measuring range can be programmed according to the customers demands with especially developed software. The communication between the thermometer and a PC is done via an USB connection. Programming-Kits are not needed.

There are two models of the PT Compact USB. The standard model for temperatures from  $-50^{\circ}\text{C}$  up to  $+200^{\circ}\text{C}$  and a high temperature model for temperatures up to  $+600^{\circ}\text{C}$ , which includes a 100 mm neck tube.

The output signal of the PT Compact USB is an analogue 4...20 mA signal.

In order to program the measuring range, it is necessary to remove the measuring insert from the housing. The USB-interface is placed directly on the electronic board of the thermometer.

Precautions have to be taken to avoid ESD-damages, while programming the electronics. You do not have to remove the thermowell of the PT Compact, in order to program the range, thus you do not have to stop your process.

All mechanical parts of the PT Compact USB are referred to the PT Compact-series. Different process connections, adjustable compression fittings, various stem-diameters and lengths are available. To achieve very fast response times, we provide a version with a tapered stem. All medium-affecting parts as well as the housing are made of stainless steel.

The electrical connection is made by a plug according to DIN EN 175301-803. Optionally a M12x1 connection is available

### Features

- simple programming, without programming unit
- integrated USB-interface
- high accuracy: 0,2% of measuring range
- reprogrammable
- Output signal: 4..20 mA
- Service friendly

### Models

- $-50^{\circ}\text{C}$  up to  $+200^{\circ}\text{C}$  ( $-60..+400^{\circ}\text{F}$ )
- $-50^{\circ}\text{C}$  up to  $+600^{\circ}\text{C}$  ( $-60..+1100^{\circ}\text{F}$ )

### Measuring range

Individual setting

Factory setting: maximum temperature range

### Applications

- engineering
- heating and cooling circuits,  
air condition technology
- plant construction
- environment engineering

**Model: TEU11**

## Technical data


	PT Compact USB
Output signal	4-20 mA 0...10V on request
Sensor	PT100 Class B Optional PT100 Class A
Supply voltage	4-20 mA, 2-wire supply voltage: 10 – 30 V DC ripple < 10%
Error signal	sensor burnout: 23mA sensor short circuit: 3,3 mA
Temperature Range	-50°C ... +200°C / -60 ...+400°F (standard) -50°C ... +600°C / -60..+1100°F (high temperature)
Measuring range	factory setting: maximum temperature range, or acc. to customer requirements  minimum measuring range: 30K maximum measuring range: temperature range
Process connections	fixed thread: G ½ A, G ¼ A, G ⅜ A, G ¾ A, ½"NPT, ¼"NPT, M14x1,5 adjustable compression fitting: G ½ A, G ⅜ A, G ¼ A, ½"NPT other connections on request
Material	stainless steel 1.4571 (316 Ti) other materials or coatings on request
Stem length and pressure ranges <sup>1)</sup>	<ul style="list-style-type: none"> <li>• Ø3mm fast reaction version with tapered stem up to 12 bar<sup>1)</sup>: stem length 25mm: Ø3 x 0,3mm stem length 50mm up to 100mm: Ø6 x 0,3mm with tapered stem Ø3 x 0,3mm from stem 150mm: Ø8 x 1,75mm with tapered stem to Ø6 x 0,3mm with tapered stem Ø3 x 0,3mm</li> <li>• Ø6 x 0,75mm from stem 50mm to 1000mm: up to 40bar<sup>1)</sup></li> <li>• Ø8 x 1,75mm from stem 50mm to 1000mm: up to 100bar<sup>1)</sup></li> <li>• special parts manufactured for pressures up to 600 bar<sup>1)</sup></li> </ul>
Ambient temperature	max. 85°C
accuracy	Transmitter: 0,2% (related to maximum temperature range)
Storage temperature	-40°C up to +85°C
Electrical connection	L-plug acc. to DIN EN 175301-803 form A optional: round connector, 4-pin, M12x1
USB-interface	Mini USB – Form B 5-pins USB 1.0 transfer rate: 1,5 Mbit/s
EMC-resistance	acc. to DIN EN 61326 (with screened connection cable)
Vibration resistance	dependent on the stem length for stem lengths up to 100mm: resistant up to 20g acc. DIN EN 60068-2-6
Shock resistance	shock resistant acc. DIN EN 837
Protection class	IP65 acc. to DIN EN 60529 / IEC 529

<sup>1)</sup> Pressure ranges refer to static pressure; Rating depends on:


- process medium
- process pressure and temperature
- flow rate
- Stem design (length, diameter, wall thickness)

Article Key	Accessories
EZE53X011004	USB-Cable Mini-USB FormB
TEZ01X999003	CD1129 (Programming software + Drivers)


## Dimensions

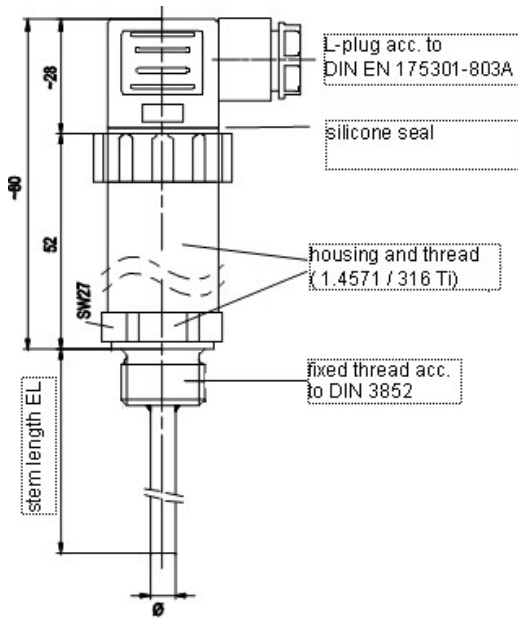

## Wiring diagram

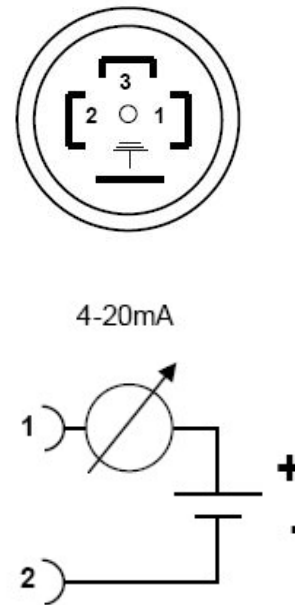

## Programming-Software for setting the measuring range via USB

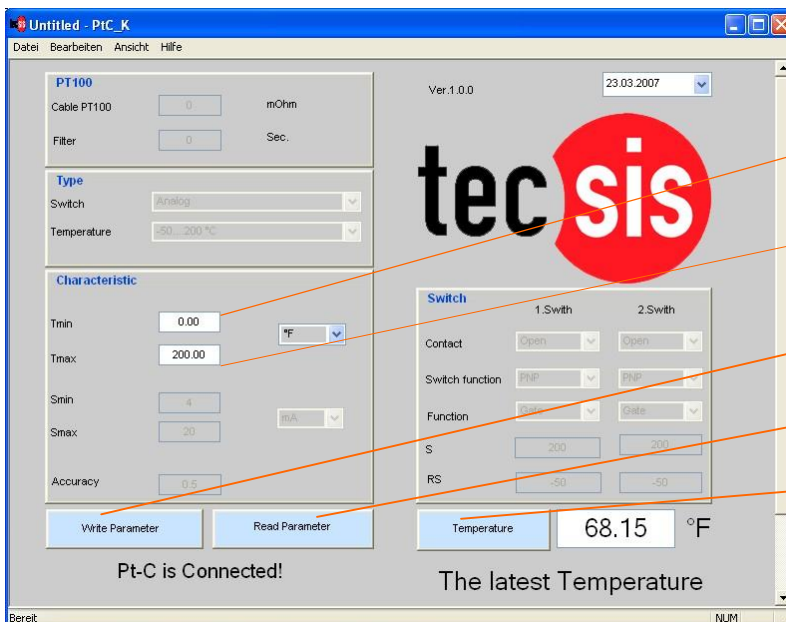

temperature at 4mA

temperature at 20mA


write parameters to transmitter

read out transmitter settings

show actual temperature

In order to set the measuring range, the plug connector must be removed and the measuring insert has to be taken out of the housing. After that the USB connection from PC to the interface on the board must be established. A detailed description, how to program the thermometer is given in the instruction manual.

Drivers and programming software can be procured direct at tecsis.

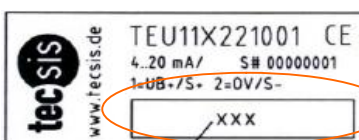

Free space for filling in the actual measuring range.

The measuring-range setting ex factory accords the maximum temperature range. Other ranges can be set on customers demand.

## Configuration

<b>Output signal</b>	4-20 mA (0-10V on demand)	TEU11
<b>Stem, temperature range and process connection</b>		
diameter	3mm - tapered, fast reaction stem	1
	6mm - standard	2
	8 mm	3
temperature range	-50°C ... +200°C (-60...400°F)	2
	-50°C ... +600°C (-60...1100°F)	4
process connection	G 1/2 A	1
	G 1/4 A	2
	G 3/8 A	3
	1/2" NPT	4
	1/4" NPT	5
	M14x1,5	6
	G 3/4 A	7
	others	
Type of process connection	fixed	<input type="checkbox"/>
	adjustable	<input type="checkbox"/>
stem length	50 mm (~2") only with fixed threads	<input type="checkbox"/>
	75 mm (~3") only with fixed threads	<input type="checkbox"/>
	100 mm (~4")	<input type="checkbox"/>
	160 mm (~6")	<input type="checkbox"/>
	200 mm (~8")	<input type="checkbox"/>
	300 mm (~12")	<input type="checkbox"/>
	400 mm (~16")	<input type="checkbox"/>
	500 mm (~20")	<input type="checkbox"/>
other length	<input type="checkbox"/>	
<b>Options</b>		
sensor	PT100 Class A	<input type="checkbox"/>
neck tube	(Standard for temperature-range -50..600°C) 100mm	<input type="checkbox"/>
	other length .....	<input type="checkbox"/>
Round connector	M12x1, 4-pin	<input type="checkbox"/>

Subject to technical modifications